


► General data

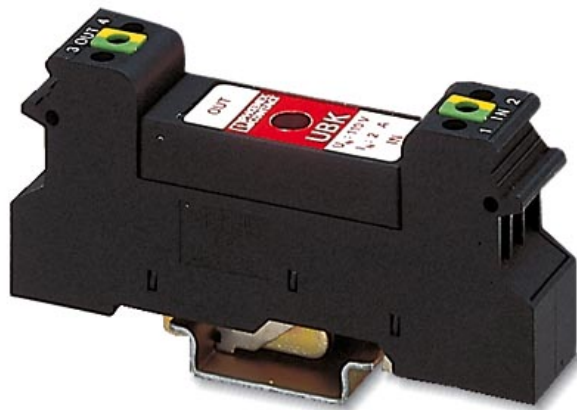

Rail-mountable module with surge voltage protection for two signal wires, for mounting on NS 32 or NS 35/7.5, housing width: 17.5 mm. Nominal voltage: 110 V AC

Order number	2797971
Type	UBK 2-110V

Barcode number	4017918073558
Unit pack	10 Pcs.
Customs tariff	85363010900

► Technical data

Connection, equipotential bonding

Stripping length	8 mm
Type of connection	M 3
Min. conductor cross section AWG/kcmil	24
Conductor cross section AWG/kcmil max	12
Min. conductor cross section, rigid	0.2 mm ²
Conductor cross section, rigid max.	4 mm ²
Conductor cross section flexible min.	0.2 mm ²
Max. conductor cross section, flexible	2.5 mm ²

Connection, protective circuit


Ambient temperature (operation)	-20 ° C ... 60 ° C
Housing material	PA

General


Degree of protection	IP 20
Inflammability class acc. to UL 94	V2

▸ Drawings

Dimensioned drawing

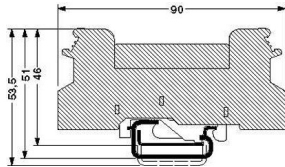

Circuit diagram

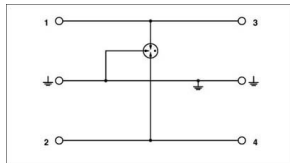

► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 3 00
Fax +49 5235 3 1200
<http://www.phoenixcontact.com>

© Phoenix Contact
Technical modifications reserved