




CR3800/12

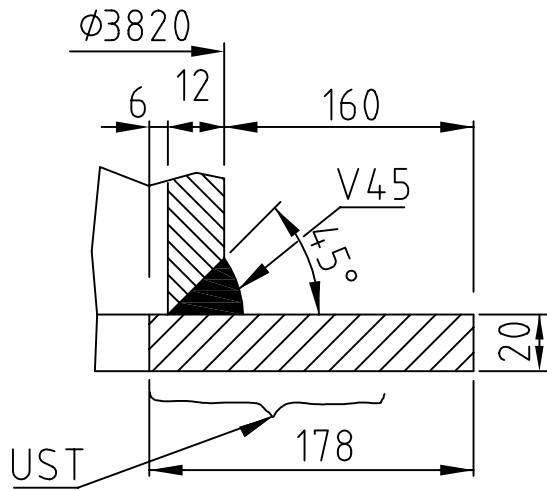



X

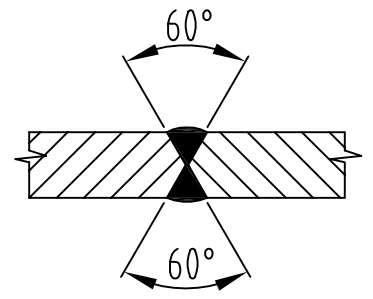


EPL

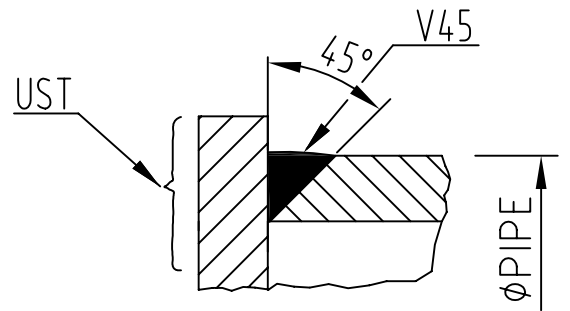


ST3800

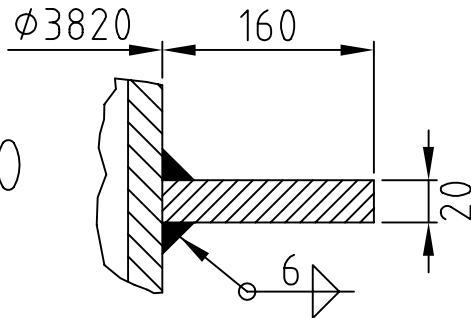

PROVIDE GAP IN ALL CONNECTIONS BETWEEN PIPE PARTS AT SITE OR SHOP




E30




ALL FILLET WELDS ARE DEFINED WITH DIMENSION <a> AS SHOWN


a = X mm



V45




V60

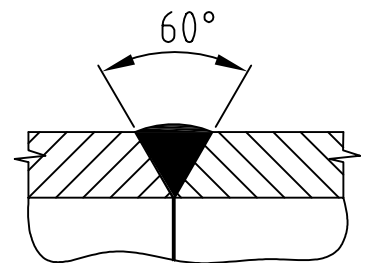


ULTRASONIC TESTED MATERIAL IN ACCORDING WITH ASTM A435

UST

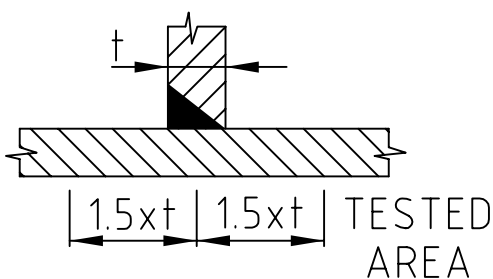

GFL



FL = FITTING LENGTH